

TA-22・22L

Features

- 1. Easy to clean by removing the valve seat even if scale or dirt deposits on the valve disc or valve seat.
- 2. Can be installed in small space because of compact body.
- 3. Since the shapes of valve and float adopt Yoshitake unique structure, stable performance and sufficient exhaust capacity can be obtained.
- 4. Even if water leaks out of the TA-22 due to failure, it can be stopped immediately by tightening the end cap, ensuring safety.
- 5. Vinyl hose can be connected easily to the TA-22L.

Specification

Application		Cold and hot water
Working pressure		0.01-1.0 MPa
Maximum temperature		100°C
Material	Body	Bronze
	Disc	FKM
	Seat	Brass
	Float	Heat-resistant resin
Connection	Inlet	JIS R screwed
	Outlet	TA-22: Cap type TA-22L: Hose joint type
Metal plating		Nickel-plated



TA-22


Dimensions (mm) and Weights (g)

●TA-22

Nominal size	d	D	H	H ₁	H ₂	Weight
15A	R 1/2	13	92	19.5	58	360
20A	R 3/4	18	97.5	25	58	400
25A	R 1	23	100.5	28.5	57.5	460

●TA-22L

Nominal size	d	D	H	H ₁	H ₂	Weight
15A	R 1/2	13	96	19.5	58	360
20A	R 3/4	18	101.5	25	58	400
25A	R 1	23	104.5	28.5	57.5	460

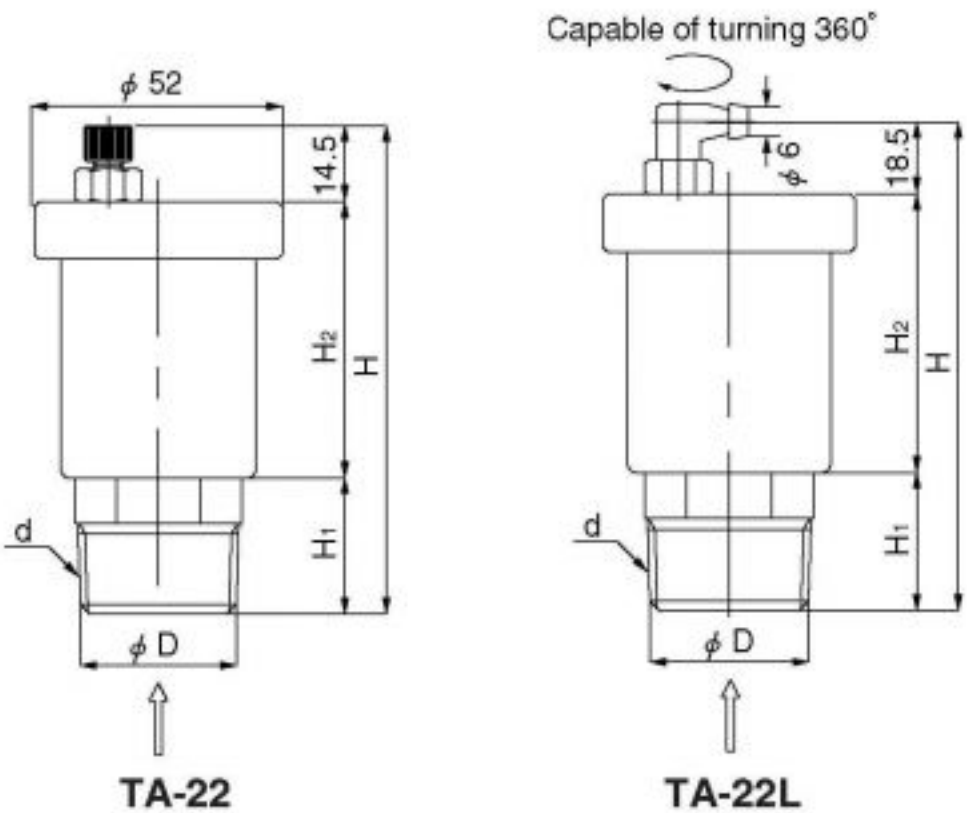

Exhaust Capacity Chart

